


Overview

MHS 6

permanent magnetic clamping blocks

Product number 2306 16

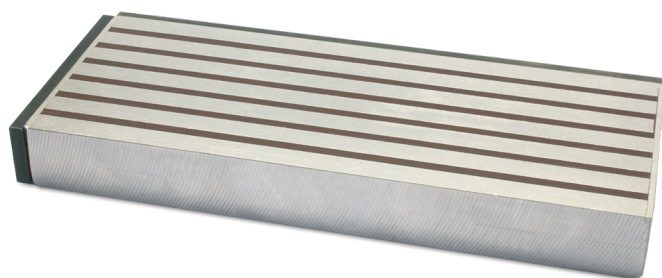

Description

MH permanent magnetic clamping blocks have 2 or 3 magnetic clamping surfaces which are not switchable. They are used for clamping very fine parts or materials that are difficult to magnetize, such as high-alloy chrome steel or carbide. After machining, the block with the clamped workpiece can be completely removed from the machine for inspection purposes. MH clamping blocks are available in standard and reinforced (with SE magnets) versions. The main areas of application are in grinding, measuring and wire cutting.

Product information

Clamping surfaces:	1
Dimension height (mm):	20
Dimension length (mm):	150
Dimension width (mm):	80
Nominal holding force (N / cm²):	180
Pole pitch (mm):	5,5
Weight (kg):	2,4