
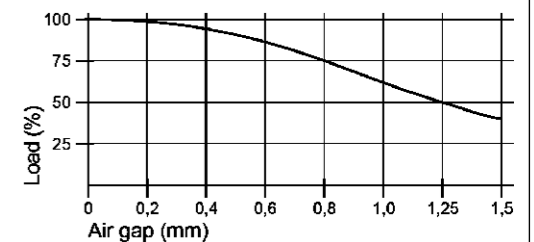



Front board control panel  
Pick-Up/Full-Mag/Safe/De-Mag

2m cable,  
optional Spiral cable 1-5m

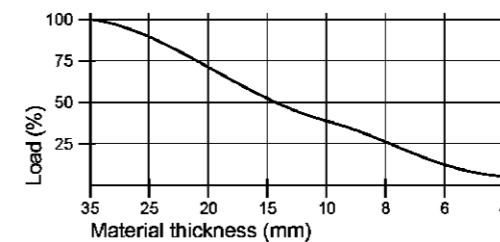

Specification FXE 2400-100			
Nominative Force: 87kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 2400kg	
15,9kVA			
U: 380-480V Pulse		Protection type IP 65	
R: 1,7Ω		Protection category SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	2000	1500	600
>=20mm	3000	2000	1500
>=35mm	3000	2000	2400

Schutzvermerk nach DIN ISO 16016 beachten!  
Nachdruck nur mit unserer Genehmigung!  
All rights reserved according to DIN ISO 16016!  
Reprint with our permission only!



date	name
drawn 19.10.2023	TW
edit 27.10.2023	
appr. 19.10.2023	TW

**FLAIG**  
Magnetsysteme  
www.flraig-te.de

material:	weight: 118kg
drawing no.:	<b>0018544</b>
description:	<b>FXE 2400-100</b>
part no.:	<b>10602403</b>
scale: 1:5	Status: Freigegeben
sheet 1 / 1	A3