

Specification FXE 12800-100	
Nominative Force: 464 kN	lifting capacity EN 13155/WLL
Materialthickness >35mm (100%)	WLL= 12800kg at air gap 0,6mm
15,9 kVA	
U: 380-480V Pulse	Protection type IP 65
R: 4x 1,7Ω + 2x 2,5Ω	Protection category SK I

Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	3000	2000	4200
>=20mm	4500	2500	6400
>=35mm	6000	3200	12800

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!		tolerance		material:	weight: 700.00
All rights reserved according to DIN ISO 16016! Reprint with our permission only!		ISO 7168 M		drawing no.:	
		date		description: FXE-HD 12800-100	
		drawn 24.08.2022 TW		part no.:	
		edit 19.10.2023		106012803	
		appr. 19.10.2023 TW		sheet 1 / 2	
		rev. change date name		A3	
		04 Tabellenwerte 19.10.2023 TW		scale: 1:10	
		03 Gewicht 12.05.2023 TW		Status: Freigegeben	
		02 Überarbeitet 27.01.2023 TW		© Copyright. All Rights Reserved	
		www.flaig-te.de			




RADIO REMOTE CONTROL:

Please note when using the remote control:
First press the red button for ON/OFF;
the Green Radio LED lights

- For switching aim for the magnet.
- Function and operation of each button see section 3 of this manual!
- Operate the magnet only by one person!
- Max. Reach 25m
- When the red Battery-LED lights change the battery

LIFTING SENSOR:

With integrated Lifting Sensor "Magnetize" and "Demagnetize" on floating Load and Lifting Magnet is not possible!

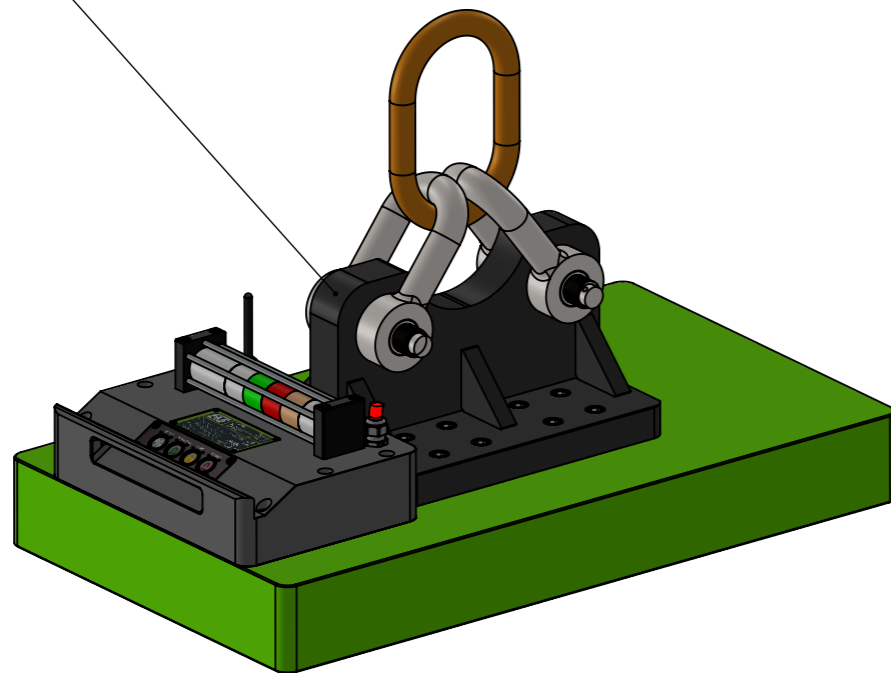

FRONT BOARD CONTROL PANEL:

The Lifting Magnet FXE is controlled via 4 built pushbuttons, they are from left to right:
PICK-UP with red LED • FULL-MAG with green LED • SAFE with orange LED • DE-MAG with white LED

Connect the lifting magnets at 400V mains voltage. The white LED above the button DE-MAG flashes to indicate that the magnet is in an undefined state.

Lifting in PICK-UP mode:

To check whether the workpiece can be transported with sufficient safety, or to lift a single sheet metal from a stack. Place the magnet on the workpiece and press the PICK-UP button, the orange Cycyle LED will flash briefly above the SAFE key. The red LED above the PICK-UP button then lights up to indicate that the magnet is activated with partial power. **In this state, the workpiece may only be lifted slightly but must not be transported under any circumstances!**

Transport in FULL-MAG operation:

After checking the safety by means of the PICK-UP operation or directly from the DE-MAG switching state, the maximum magnetization can be triggered with this key. After pressing, the orange cycle LED above the SAFE key lights up briefly and then the green status LED above the FULL-MAG key turns on to indicate that the maximum magnetization has occurred. Carry out transports only if the green LED lights up and the alarm LED (SAFE) does not flash!

Releasing the workpiece by DE-MAG:

To release the workpiece, the SAFE and DE-MAG keys must be pressed simultaneously. The orange cycle LED above the SAFE key lights up briefly and then the white status LED above the DE-MAG key lights up.

LED signal lights:

For better visualisazion a LED signal light is mounted on the magnet. The signal lights show the same status as the lights on the front board control panel.

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!					tolerance	material:	weight: 700.00
All rights reserved according to DIN ISO 16016! Reprint with our permission only!					ISO 7168 M	drawing no.: 0018835	
				date	name	description: FXE-HD 12800-100	
				drawn	24.08.2022	TW	
				edit	19.10.2023		
				appr.	19.10.2023	TW	
04	Tabellenwerte	19.10.2023	TW	 www.flraig-te.de		part no.:	sheet 2 / 2
03	Gewicht	12.05.2023	TW			106012803	A3
02	Überarbeitet	27.01.2023	TW				
rev.	change	date	name	scale: 1:10	Status: Freigegeben		