

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag



2m cable,
optional Spiral cable 1-5m

Specification FXE 1600-50+

Nominative Force: 68,4kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 1600kg
10,4 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 2,6Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	3000	1500	300
>=6mm	3000	1500	500
>=8mm	3000	1500	800
>=10mm	3000	1500	1400
>=15mm	3000	2000	1600

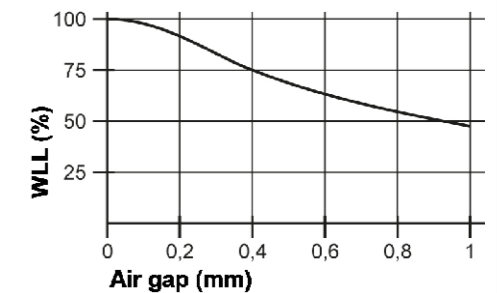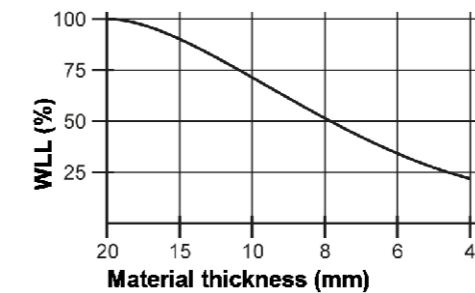

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!

3,2 / -0,05 / -0,2 tolerance
ISO 7168 M

material: weight: 60

date name
drawn 25.09.2023 TW
appr. 20.10.2023 TW

drawing no.: **0018540**

description: **FXE 1600-50+**

FLAIG
Magnetsysteme
www.flraig-te.de

part no.: **10601611**

sheet 1 / 1
A3

02 Tabellenwerte 20.10.2023 TW
rev. change date name

scale: 1:4 Status: Freigegeben