
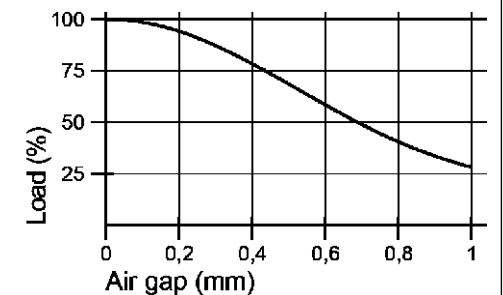


Specification FXE 1100-50

Nominative Force: 45,6kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 1100kg
3,5 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 7,8Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	2000	1500	200
>=6mm	3000	1500	370
>=8mm	3000	1500	600
>=10mm	3000	1500	900
>=15mm	3000	1500	1100

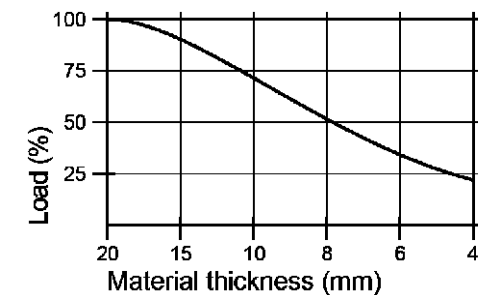

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!			tolerance	material:	weight: 39kg
All rights reserved according to DIN ISO 16016! Reprint with our permission only!			ISO 7168 M	drawing no.: 0018472	
date	name	description: FXE 1100-50			
drawn 20.10.2023	TW	part no.: 10601101			
edit 20.10.2023		sheet 1 / 1			
appr. 20.10.2023	TW	A3			
 www.flraig-te.de		scale: 1:4	Status: Freigegeben		